


# PBL42-35 BLDC motor

Ø42 mm frame // 35 mm stack

**parvalux**  
by **maxon**

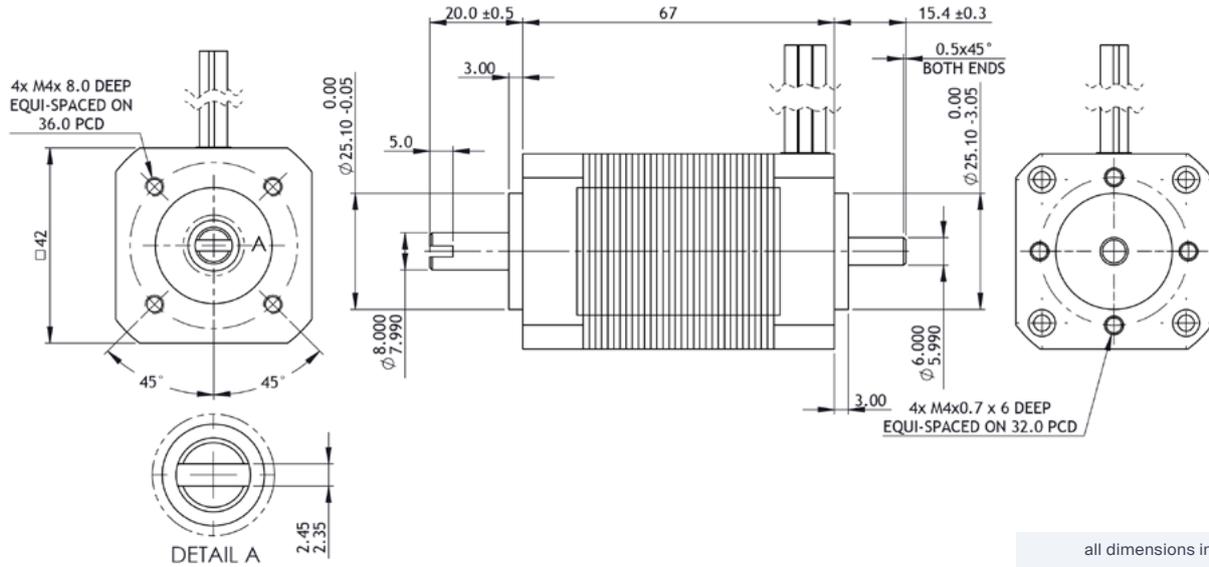

Part number key	
Modular	#####
Standard	#####
Calculated data	#####

Technical data				Connection details		
1 Part number		776616	776617	Lead colour	Lead gauge	Function
2 Nominal power	W	42	42	Red	UL1569/26 AWG	VCC
3 Nominal voltage	V	24	48	Black	UL1569/26 AWG	GND
4 No load speed	rpm	5835	6001	Yellow	UL1569/26 AWG	Hall A
5 No load current	A	0.4	0.3	Green	UL1569/26 AWG	Hall B
6 Nominal speed	rpm	4000	4000	Blue	UL1569/26 AWG	Hall C
7 Nominal continuous torque (S1)	Nm	0.10	0.10	Yellow	UL1569/20 AWG	Phase U
8 Nominal continuous current (S1)	A	2.6	1.3	Green	UL1569/20 AWG	Phase V
9 Max Intermittent torque (S2 - 15 minutes)	Nm	0.15	0.15	Blue	UL1569/20 AWG	Phase W
10 Stall current	A	9.6	5.0			
11 Stall torque	Nm	0.4	0.4			
12 Stack length	mm	35	35			
13 Maximum efficiency	%	77	75			
14 Ra	Ω	0.87	3.35			
15 RI	mH	1298	5415			
16 Speed constant	rpm/V	251.7	132.2			
17 Torque constant	Nm/A	0.043	0.093			
18 Speed torque gradient	rpm/Nm	14157	13361			
19 Rotor inertia	Kgcm <sup>2</sup>	5.5 x 10 <sup>-6</sup>	5.5 x 10 <sup>-6</sup>			
20 Weight	Kg	0.45	0.45			

Thermal data		Modular system			
22 Ambient temperature	°C	40			
<b>Mechanical data</b>		<b>Gearbox</b>	<b>+L mm</b>	<b>Brake</b>	<b>+L mm</b>
23 Radial load [distance from flange]	N [mm]	130 [15]	GB28	88.0	N/A
24 Radial play	mm [g]	0.06 [450]	PGx42	370 - 81.0	-
25 Axial end play	mm [g]	0.06 [450]			
<b>Other data</b>		<b>Encoder</b>	<b>+L mm</b>	<b>Controller</b>	
26 Number of poles		Incr. 5-pin	9.0	SC 50/15	
27 Winding type		Incr. 10-pin	9.0	Key	
28 Hall effect angle (electrical angle)	°	Diff. 10-pin	12.0	Standard combination	
29 IP Rating				Modular combination	
30 Enclosure				+L mm = approximate added length*	
31 Insulation Class					

\*additional length may also be required for mounting flange between components